



Seatorium

Auditorium Solutions

**CINEMA
MOVIE THEATER
SEATS**

CATALOG

2024



3



13



22



30



41



5



15



24



32



44



7



17



26



34



46



9



20



28



38





Seatrest and Backrest



Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of $50 \pm 10\%$ densty and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Top of armrests are covered with fabric. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m2. Seatrest have resistant plastic cover and backrest is whole fabric covered.

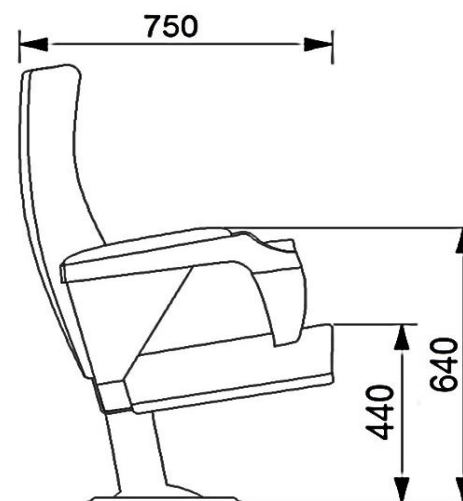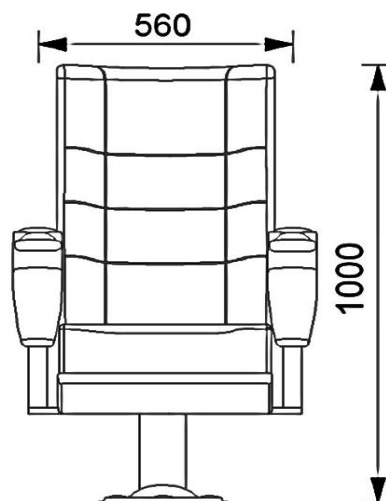





Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of 50 ± 10 % densty and Mvss 302 fire behaviour.



Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m2. Seatrest have resistant plastic cover and backrest is whole fabric covered.

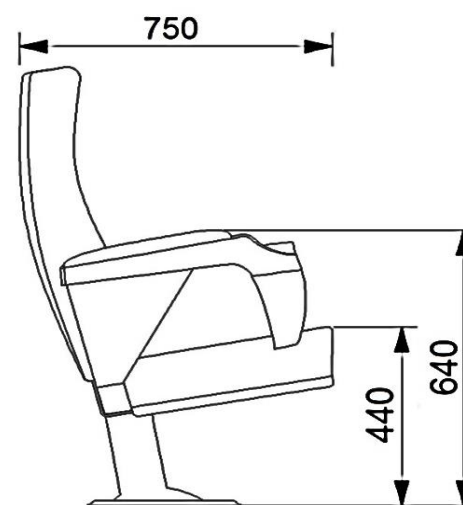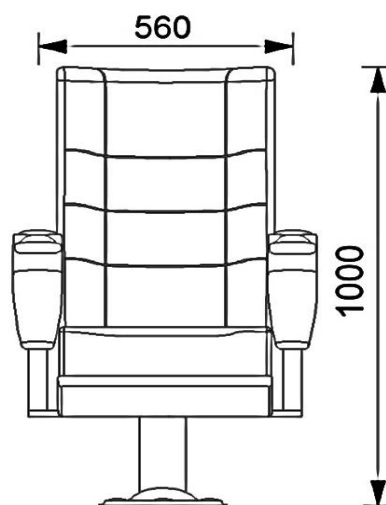



BOLTON S50



Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to have self-closing weight-centered mechanism.



Foot and Armrest

The foot connection parts are manufactured from 40x60x1,5 profile and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Metal frame under armrest are covered with mdf and laminated fabric. Plastic armrests have resistant to impact and they are fix on the metal frame. Armrests between the seats are used as a common and seats are fixed to the ground with 2 feet.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m2. Seatrest and backrest are covered with durable plastic with acoustic specification.

FABRIC COLOR OPTIONS

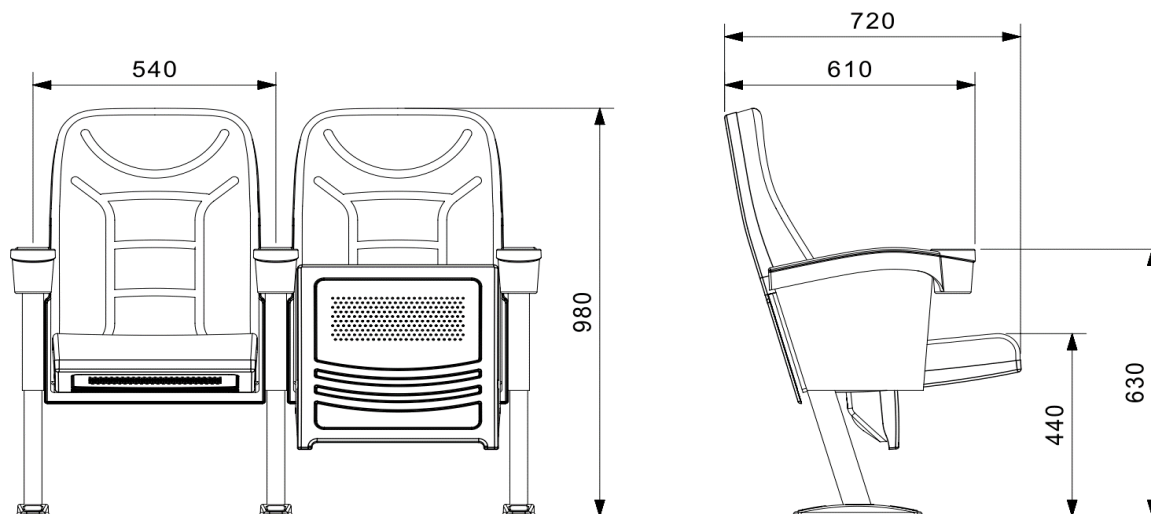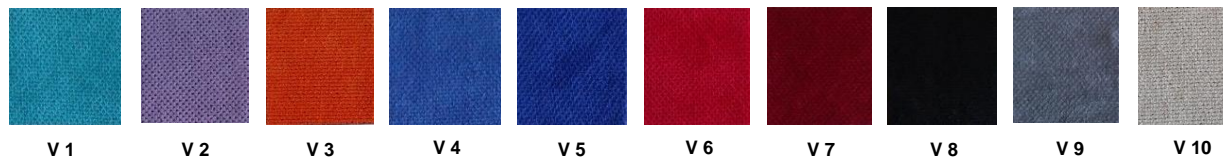





Seatrest and Backrest



Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standard of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Top of armrests are covered with fabric. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m². Seatrest have resistant plastic cover and backrest is whole fabric covered.

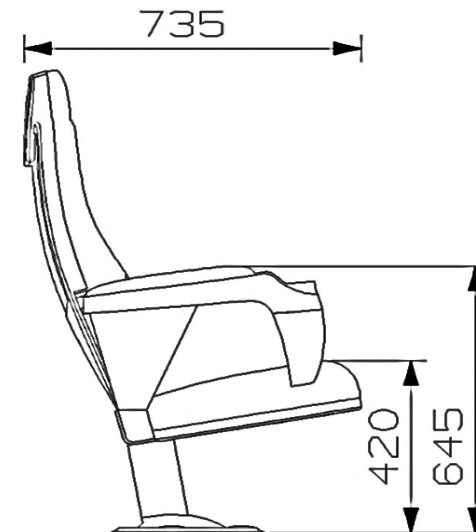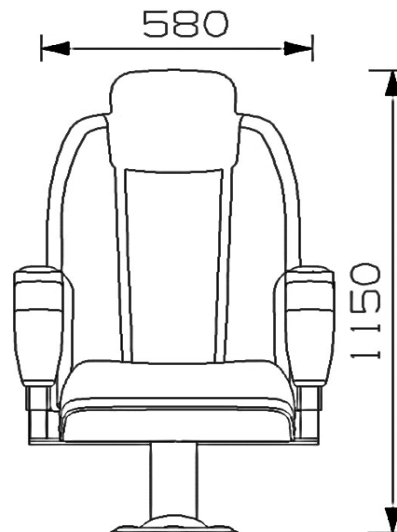









Seatrest and Backrest


Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of 50 ± 10 % density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Leather covered MDF armrests are fix on the metal frame. Metal cup holder are placed in the Armrest. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery Artificial Leather is 80% polyurethane, 20% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 40,000 cycles. Weight: 550 gr / m². Seatrest and backrest are covered whole with Artificial Leather.

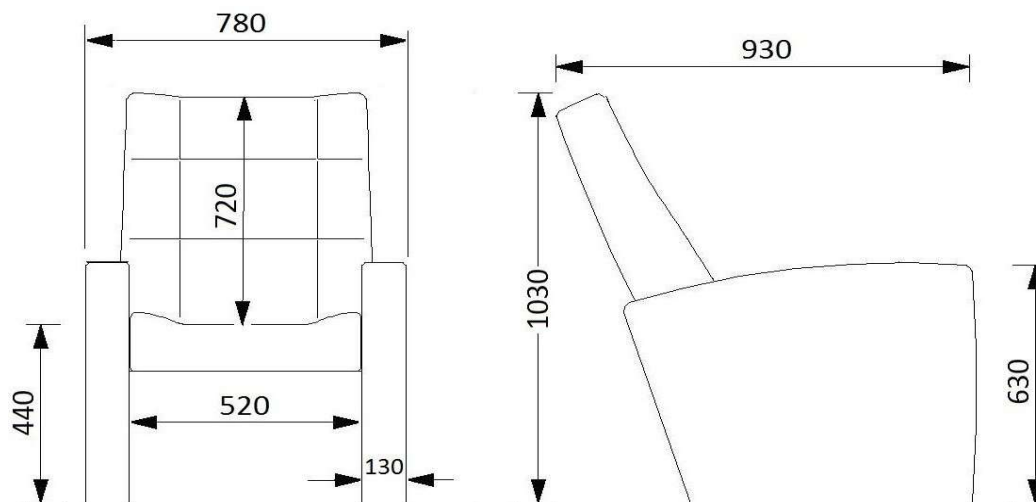





Seatrest and Backrest


Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Top of armrests are covered with fabric. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m². Seatrest have resistant plastic cover and backrest is whole fabric covered.

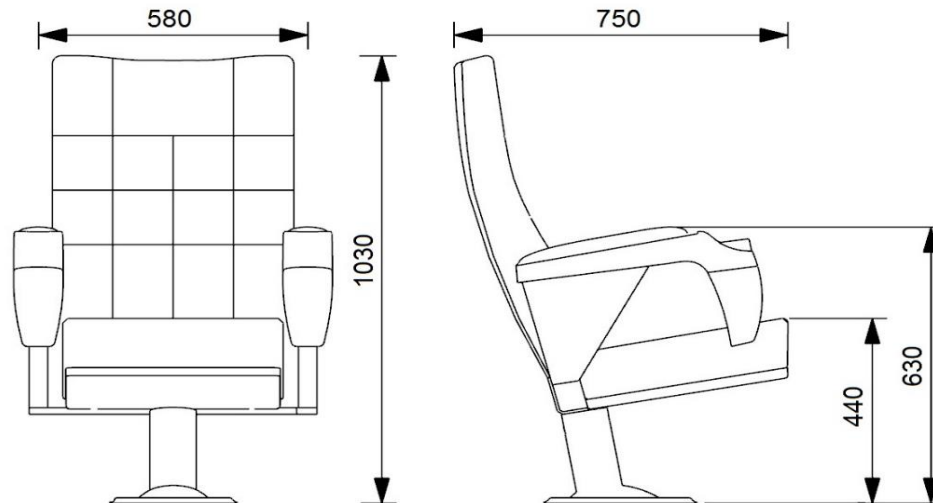





Seatrest and Backrest



Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standard of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Leather covered MDF armrests are fix on the metal frame. Metal cup holder are placed in the Armrest. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery Artificial Leather is 80% polyurethane, 20% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 40,000 cycles. Weight: 550 gr / m². Seatrest and backrest are covered whole with Artificial Leather.

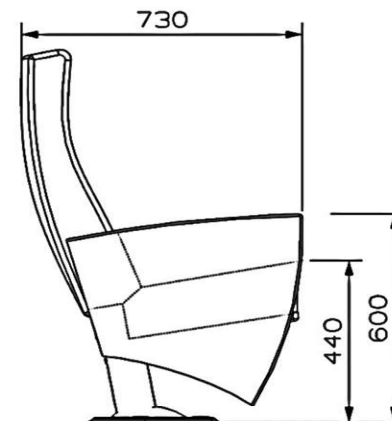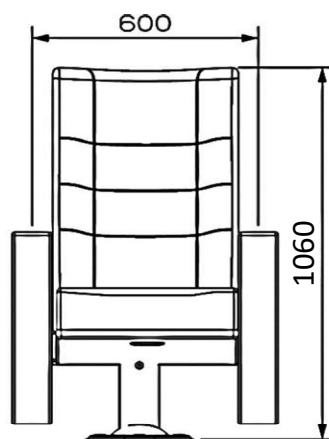

Loren T10



 **Seatorium**
Auditorium Solutions







Seatrest and Backrest



Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of 50 ± 10 % density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Fabric covered MDF armrests are fix on the metal frame. Metal cup holder are placed in the Armrest. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m2. Seatrest have resistant plastic cover and backrest is whole fabric covered.

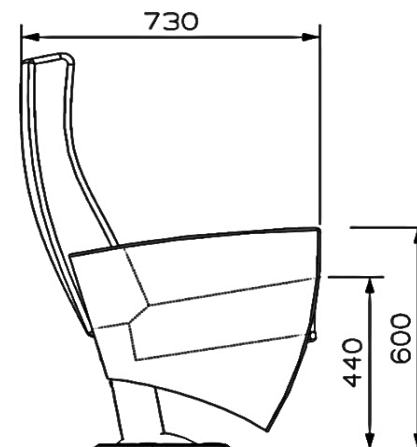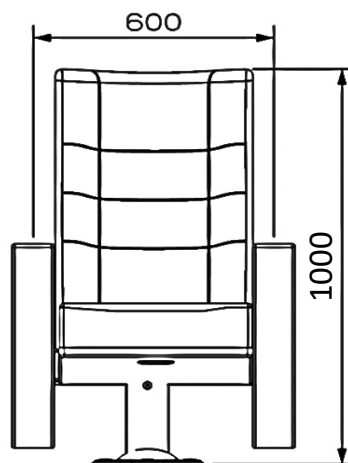



LOREN T40



Seatrest and Backrest



Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standard of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Leather covered MDF armrests are fix on the metal frame. Metal cup holder are placed in the Armrest. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery Artificial Leather is 80% polyurethane, 20% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 40,000 cycles. Weight: 550 gr / m². Seatrest and backrest are covered whole with Artificial Leather.

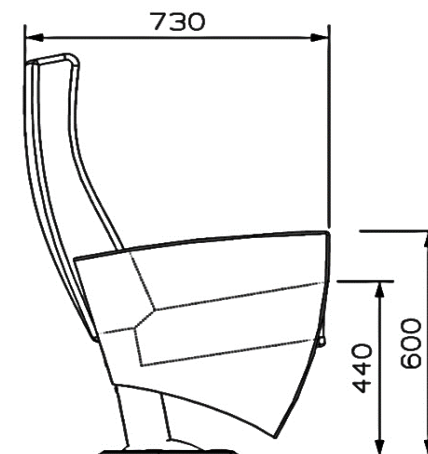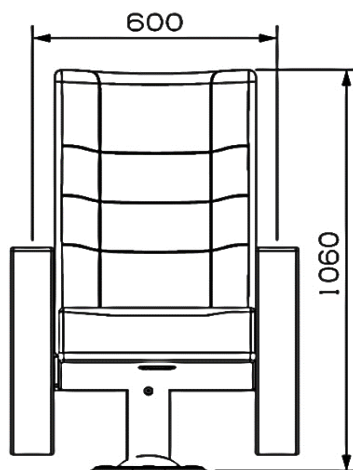





Seatrest and Backrest


Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of 50 ± 10 % densty and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Leather covered MDF armrests are fix on the metal frame. Armrest are made of polished beech material and writing table is hidden inside the leg. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery Artificial Leather is 80% polyurethane, 20% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 40,000 cycles. Weight: 550 gr / m². Seatrest and backrest are covered whole with Artificial Leather.

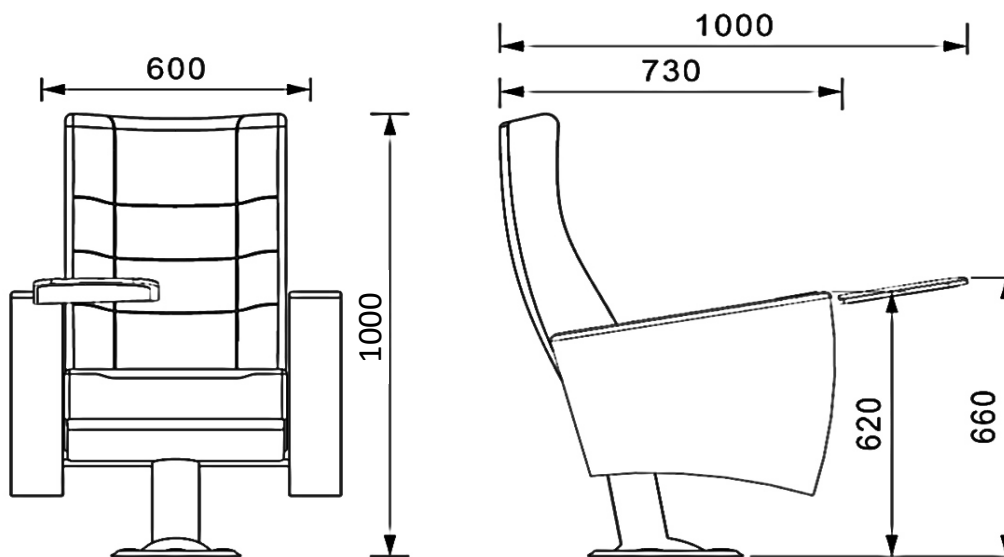





Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standard of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to have self-closing weight-centered mechanism.




Foot and Armrest

The foot connection parts are manufactured from 40x60x1,5 profile and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic armrests have resistant to impact and they are fix on the metal frame. Armrests between the seats are used as a common and seats are fixed to the ground with 2 feet.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m2. Seatrest and backrest are covered with durable plastic with acoustic specification.

FABRIC COLOR OPTIONS

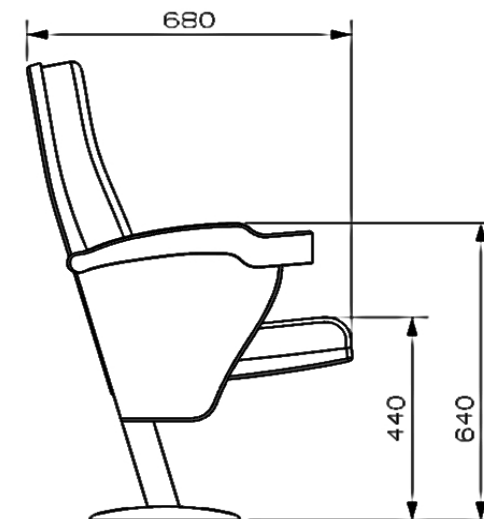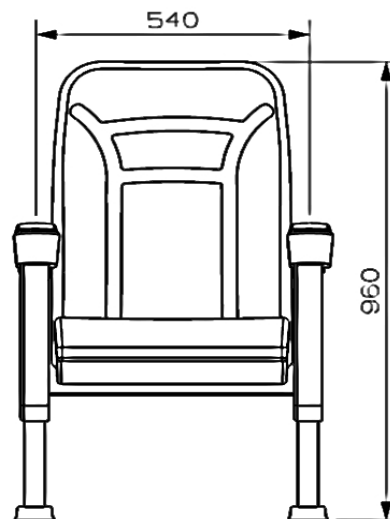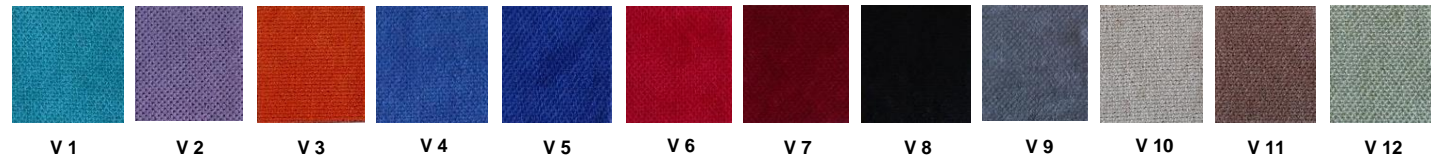





Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standard of $50 \pm 10\%$ density and Mvss 302 fire behaviour.

Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to have self-closing weight-centered mechanism.



Foot and Armrest

The legs are made of plastic material resistant to impacts and having a wall thickness of 8 mm. Plastic cup holder armrests

Armrests between the seats are used as a common and seats are fixed to the ground with 2 plastic feet.

Upholstery

The upholstery Artificial Leather is 80% polyurethane, 20% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 40,000 cycles. Weight: 550 gr / m². Seatrest and backrest are covered whole with Artificial Leather.

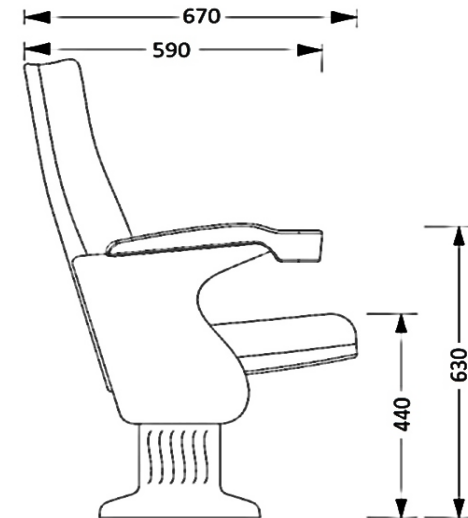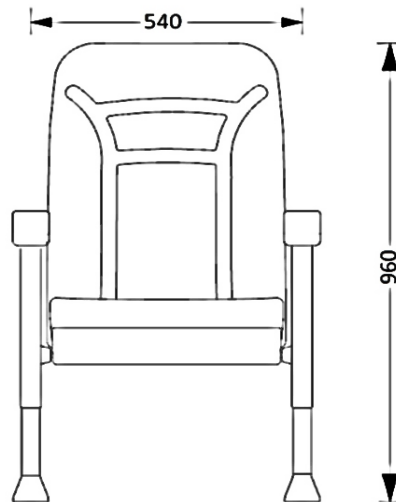





Seatrest and Backrest



Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Top of armrests are covered with fabric. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m². Seatrest have resistant plastic cover and backrest is whole fabric covered.

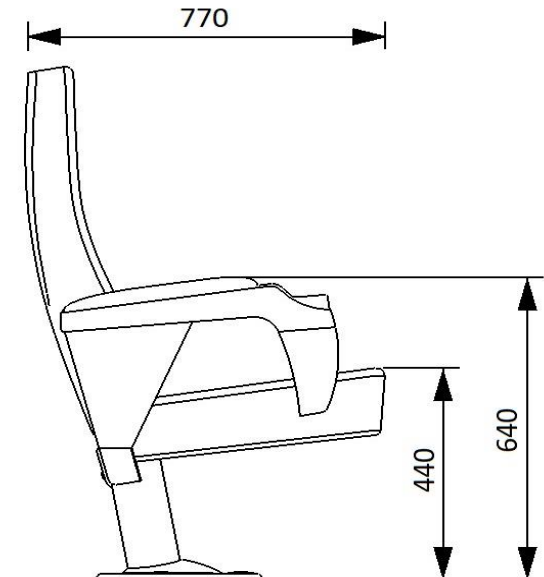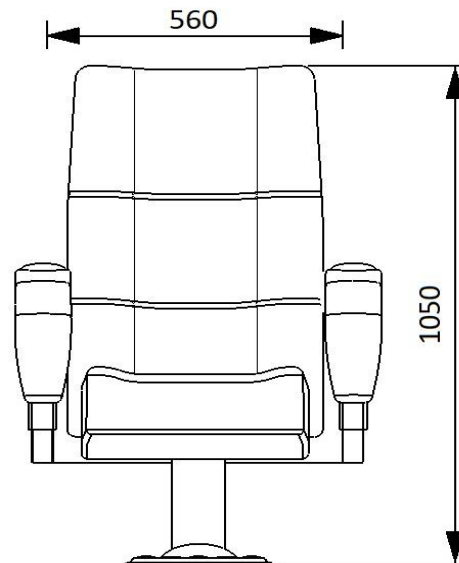





Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of 50 ± 10 % densty and Mvss 302 fire behaviour.



Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m². Seatrest have resistant plastic cover and backrest is whole fabric covered.

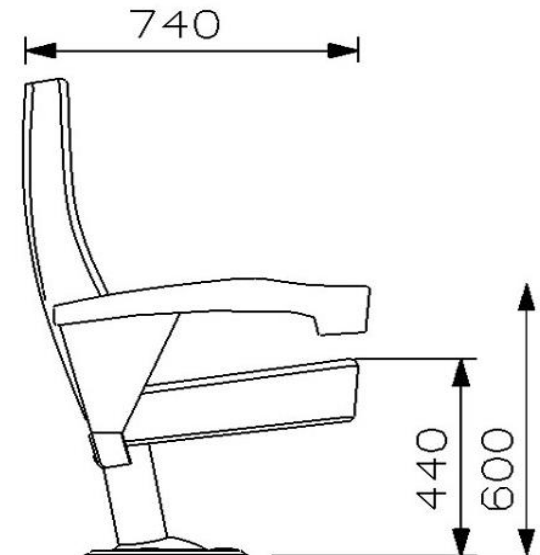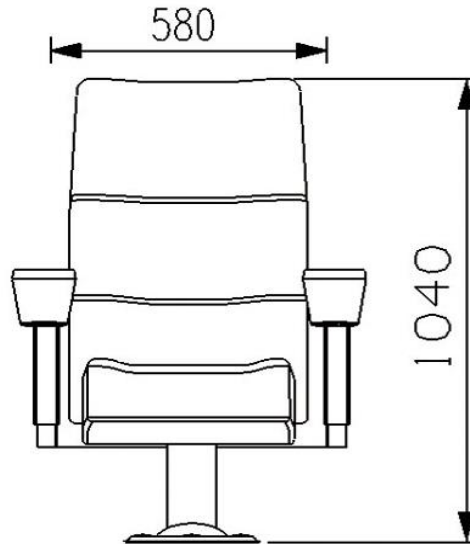





Seatrest and Backrest



Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standard of $50 \pm 10\%$ density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Fabric covered MDF armrests are fix on the metal frame. Plastic cup holder are fix to the front of the Armrest. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.


Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m². Seatrest have resistant plastic cover and backrest is whole fabric covered.

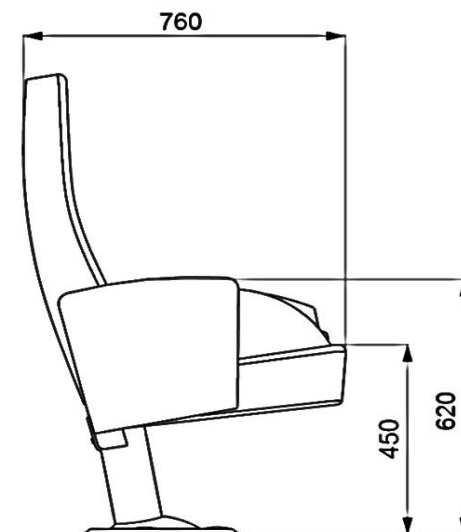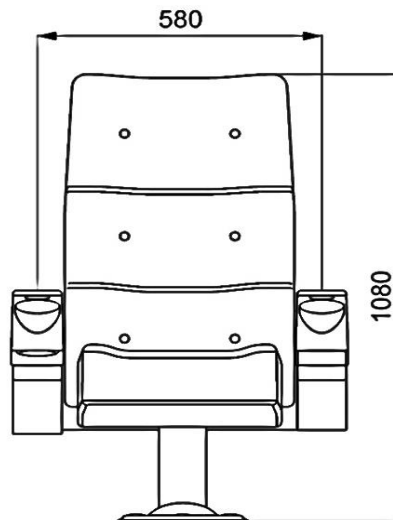





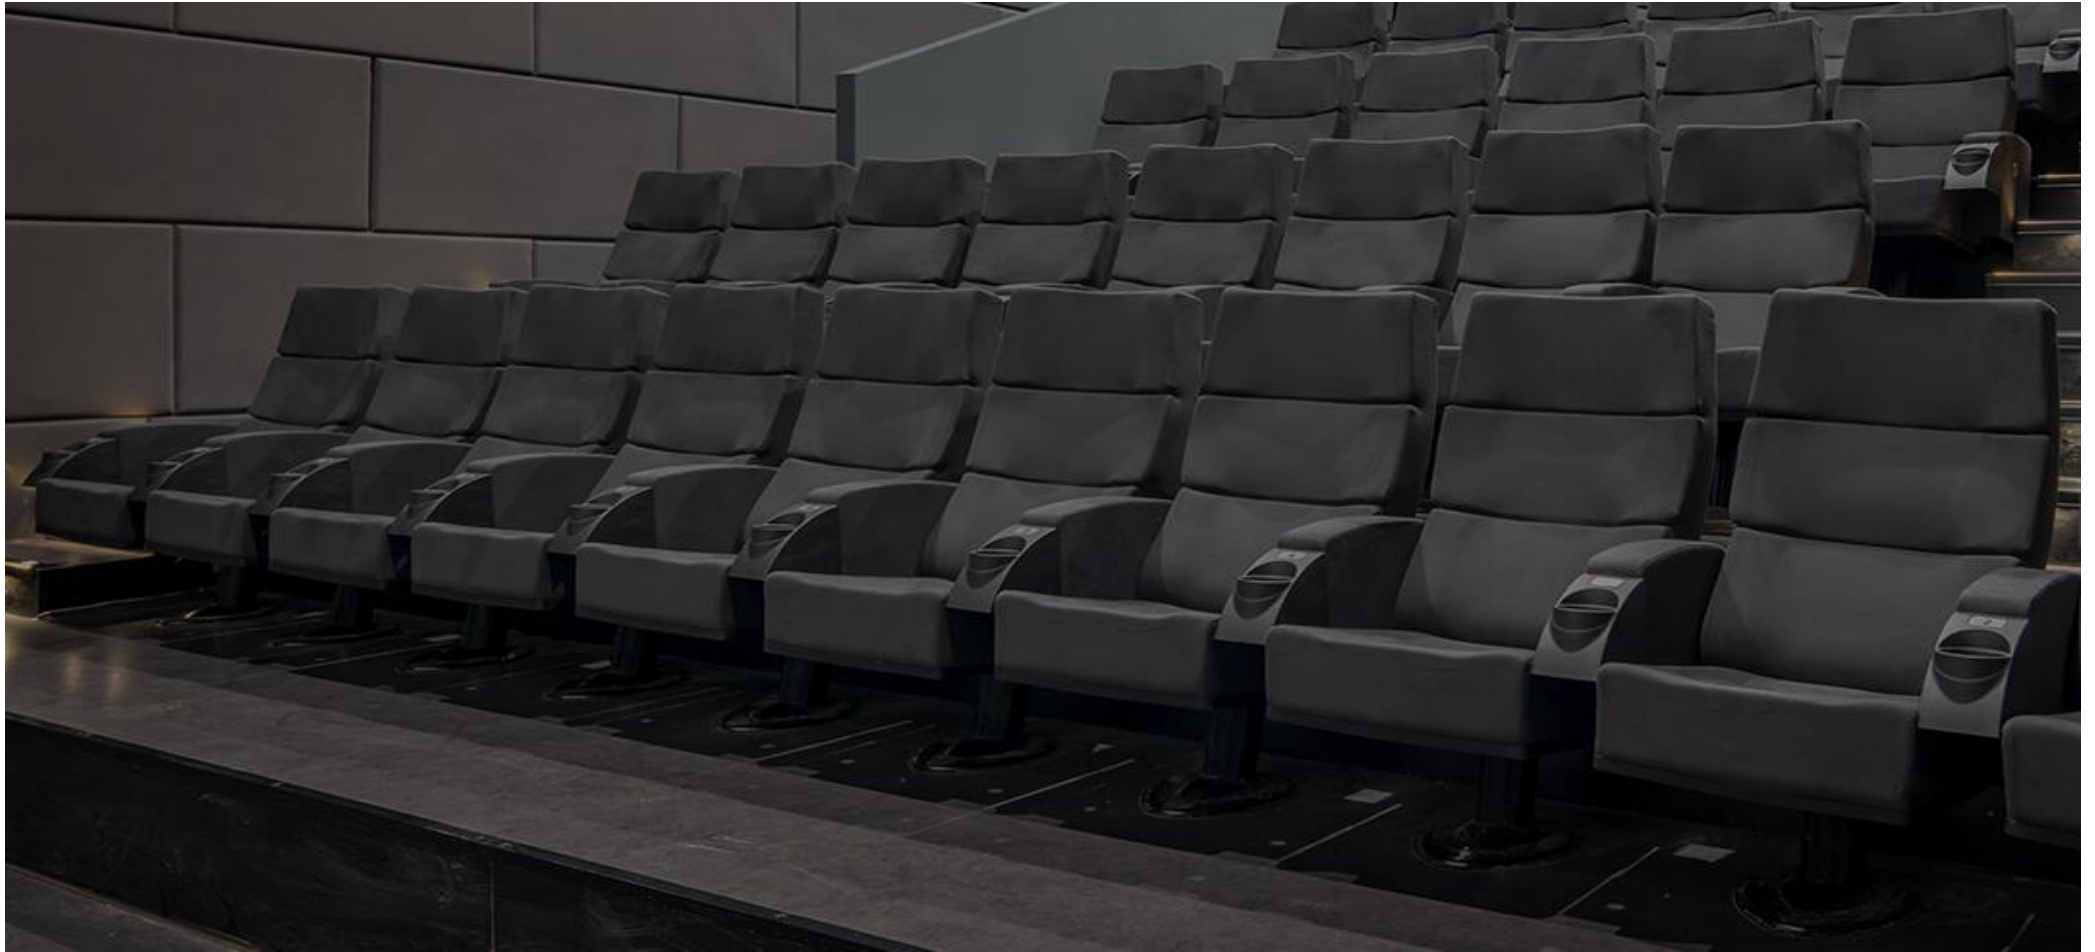



Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standard of 50 ± 10 % density and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.


Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Leather covered MDF armrests are fixed on the metal frame. Metal cup holder are placed in the Armrest. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery Artificial Leather is 80% polyurethane, 20% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 40,000 cycles. Weight: 550 gr / m². Seatrest and backrest are covered whole with Artificial Leather.

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m². Seatrest and backrest are whole fabric covered.

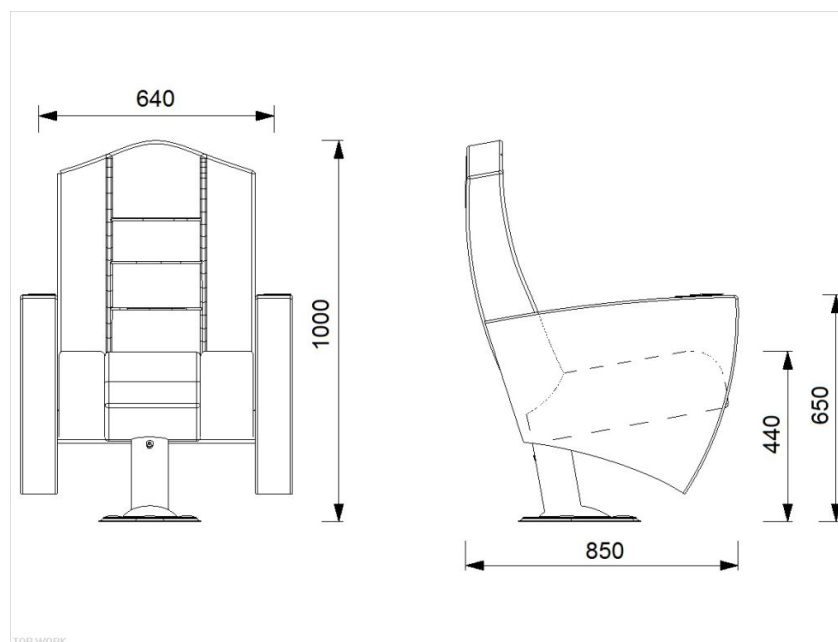







Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of $50 \pm 10\%$ densty and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to have self-closing mechanism with a weight-centered mechanism.




Foot and Armrest

The foot connection parts are manufactured from 40x60x1,5 profile and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Metal frame under armrest are covered with mdf and laminated fabric. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Armrests between the seats are used as a common and seats are fixed to the ground with 2 feet.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m2. Seatrest and backrest are covered with fabric.

FABRIC COLOR OPTIONS

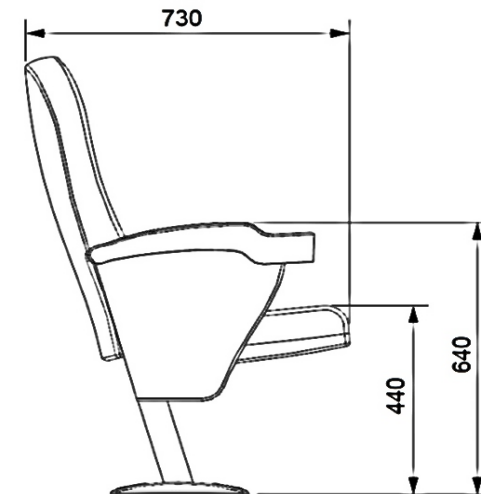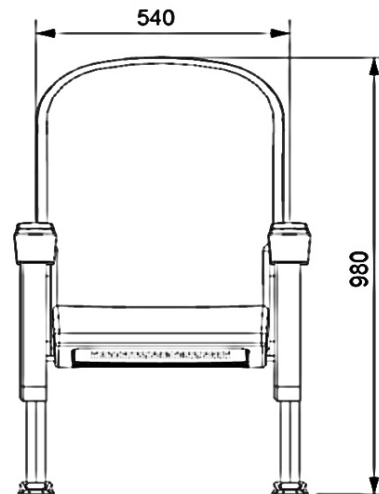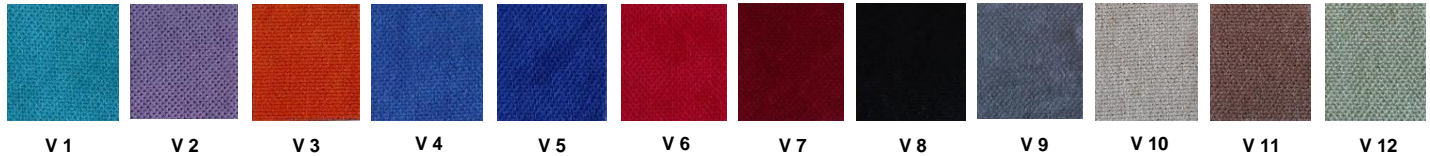



TULIP P10



Seatrest and Backrest


Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of $50 \pm 10\%$ densty and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Plastic cup holder armrests have resistant to impact and they are fix on the metal frame. Top of armrests are covered with fabric. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery fabric is 100% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 60,000 cycles. Weight: 285 gr / m2. Seatrest have resistant plastic cover and backrest is whole fabric covered.

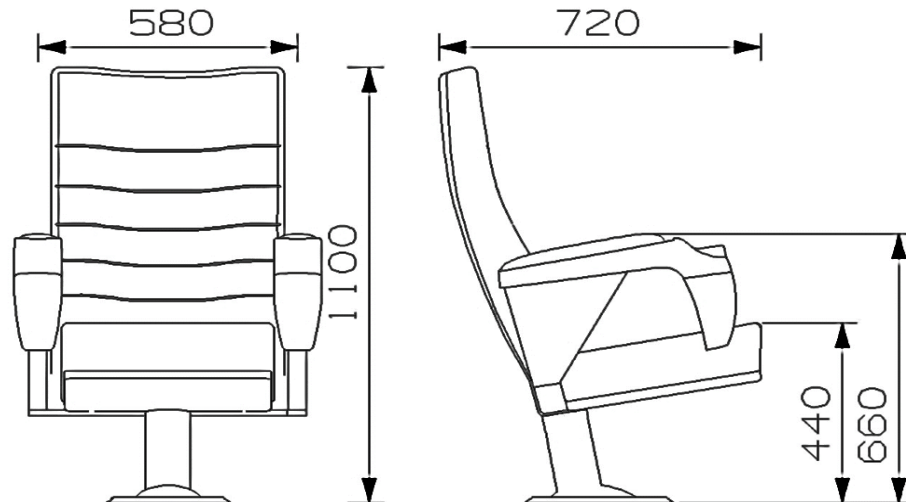







Seatrest and Backrest

Seatrest and Backrest are manufactured from polyurethane material in aluminum molds which are designed in accordance to the human anatomy and have the standart of 50 ± 10 % densty and Mvss 302 fire behaviour. Seatrest and Backrest have a durable inner skeleton made of metal profile. Seatrests are manufactured as to be fixed.

Foot and Armrest

The foot connection parts are manufactured from pipe with a diameter of 100 mm and 2.5 mm thickness and the connection parts to the floor are made of at least 2 mm sheet which is shaped and formed by molds. Leather covered MDF armrests are fix on the metal frame. Metal cup holder are placed in the Armrest. Armrests between the seats are used as a common and seats are fixed to the ground with single foot.

Upholstery

The upholstery Artificial Leather is 80% polyurethane, 20% polyester, has resistant to friction, non-flammable and have fastness properties. Friction Strength: 40,000 cycles. Weight: 550 gr / m2. Seatrest and backrest are covered whole with Artificial Leather.

