

Zero Single




Datasheet

chairium

Datasheet



As Seatorium, we are pleased to manufacture commercial cinema & movie theater recliners for our customers who care about design and comfort. With the advantage of being a manufacturer of VIP cinema & theater seats, we can customize all our seats according to the wishes of our customers.



Fabric : Available
Artificial Leather : Available
Genuine Leather : Ask us!




Zero Single has a motorized mechanism. You can easily adjust the position you want with the ergonomically designed button. Zero Single, which provides a very comfortable use with the cup holders on the right and left arms, switches to reading mode thanks to the adjustable leg section, and offers you more than a seat by switching to sleep mode.

Zero Single reclines 145 degrees.

Optional massage feature is optional. The massage feature massages 5 different areas in 8 different modes.




*cm

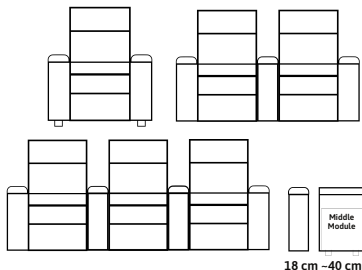

IMPORTANT NOTE : Our recliner models can be produced according to desired dimensions. In shared armrest seating arrangements, the total width may vary depending on the connection type of the armrests. Contact us for detailed information.



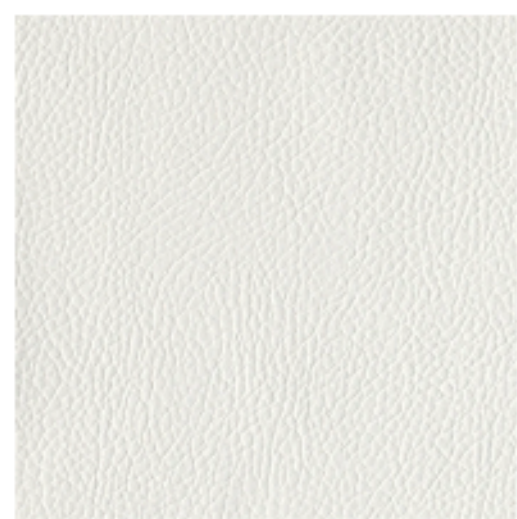

001 White



005 Ivory



042 Sand



007 Light Beige



028 Beige




027 Java




062 Desert



306 Caramel

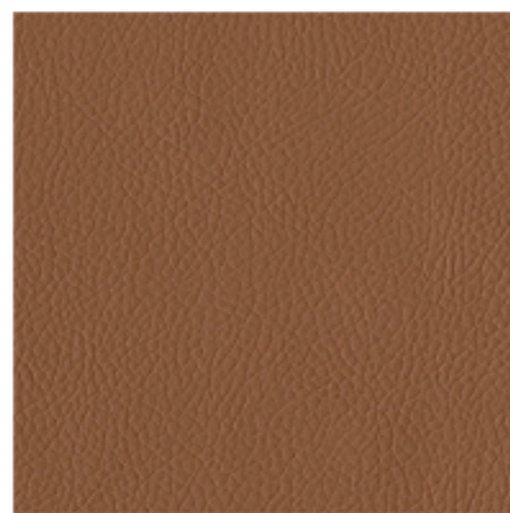

317 Croquant

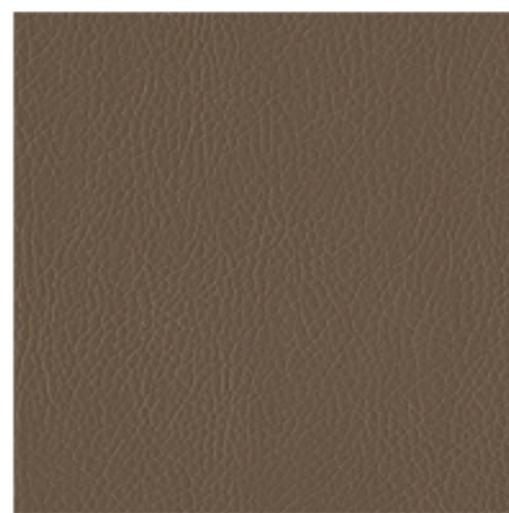


068 Taupe



360 Latte



310 Mocha

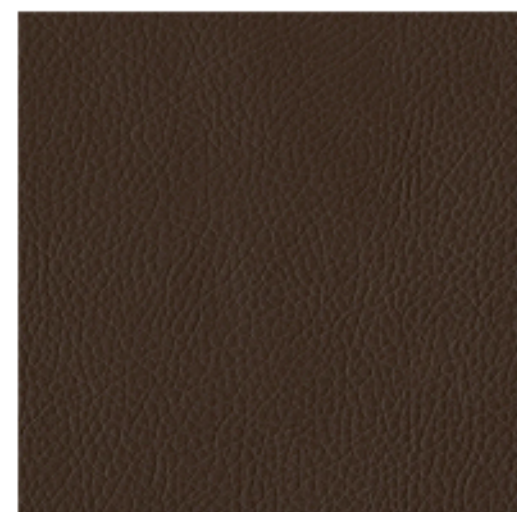

370 Bitter




303 Mustard



308 Camel



257 Taba

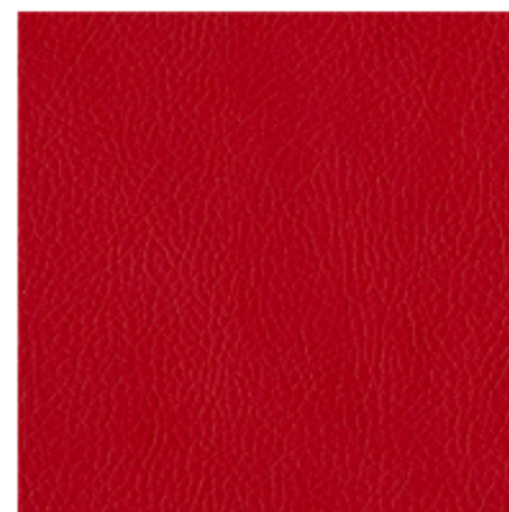

260 Red




275 Cherry




430 Army



460 Grass

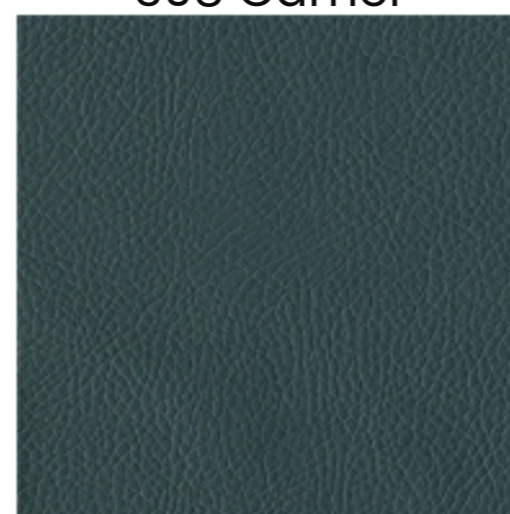

480 Petrol

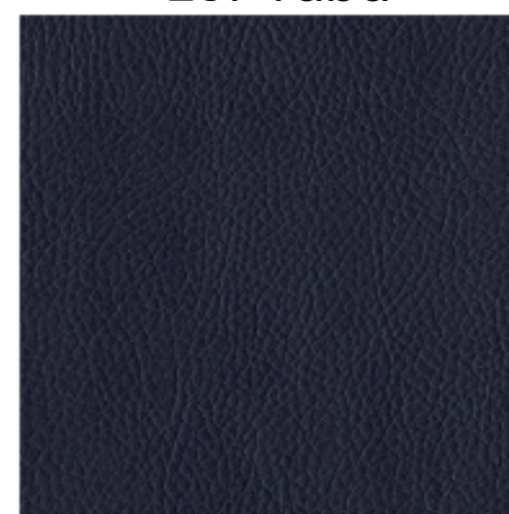


525 Navy Blue




006 Mink




602 Pearly Grey

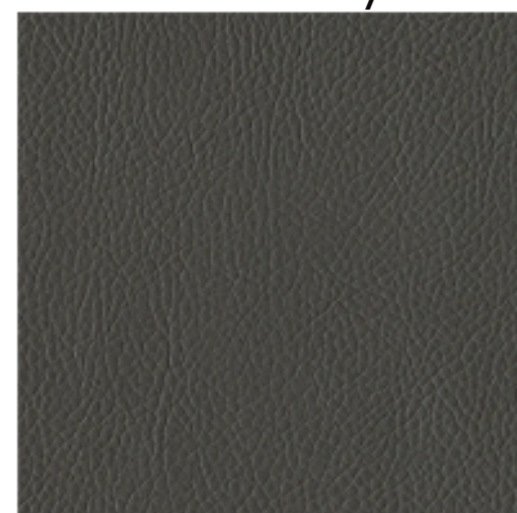

606 Silver Grey

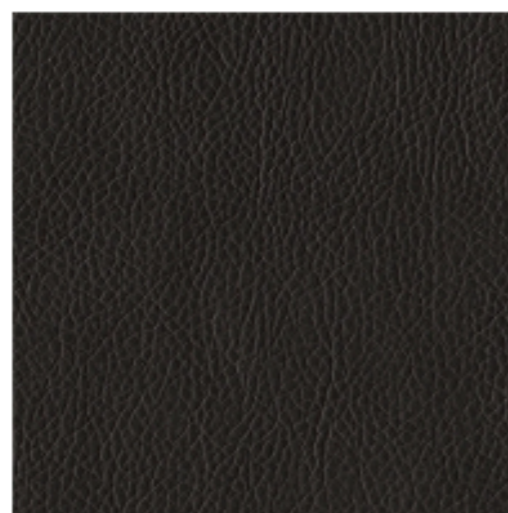

625 Dark Grey

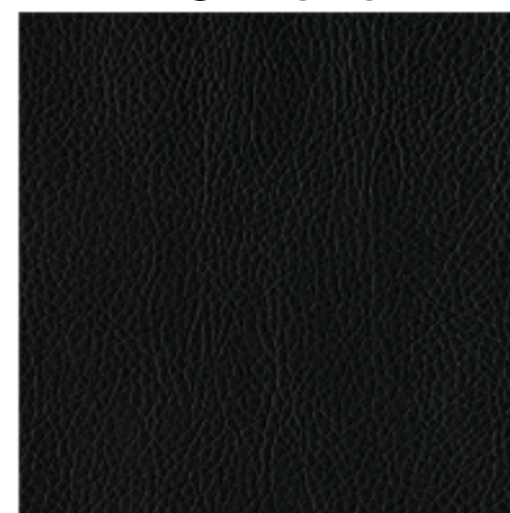

901 Black



Seatorium
Auditorium Solutions

Contact us for high quality images.

Artificial Leather Colors

Technical Details : Next Page

GLORY

TECHNICAL CHARACTERISTICS / TEKNİK ÖZELLİKLER

COMPOSITION/İÇERİK	BACKING/ZEMİN
VINYL / URETHANE TOP COAT VİNİL / POLİÜRETAN YÜZEY	%100 POLYESTER

TEST TYPES / TEST TİPİ	ASPECT / KRİTER	NORM	UNIT / BİRİM	STANDART TEST
WEIGHT / AĞIRLIK		550 ± 40	g / m ²	ISO 2286-2
MARTINDALE - ABRASION / AŞINMA DAYANIMI		> 50.000	RUB	ISO 5470-2
TEAR STRENGTH / YIRTILMA DİRENCİ	ACROSS / EN	> 20	N	ISO 4674-1
	ALONG / BOY	> 20	N	ISO 4674-1
TENSILE STRENGTH / KOPMA DİRENCİ	ACROSS / EN	> 200	N	ISO 1421
	ALONG / BOY	> 250	N	ISO 1421
ELONGATION AT BREAK / KOPMA ANINDAKİ UZAMA	ACROSS / EN	210 ± 20%	%	ISO 1421
	ALONG / BOY	100 ± 20%	%	ISO 1421
COLOR FASTNESS TO RUBBING / SÜRTÜNME RENK HASLIĞI	DRY / KURU	≥ 4	GS	ISO 105-X12
	WET / ISLAK	≥ 4	GS	ISO 105-X12
LIGHT FASTNESS / IŞIK HASLIĞI	LIGHT COLORS / AÇIK RENKLER	≥ 4	BW	ISO 105-B02
	DARK COLORS / KOYU RENKLER	≥ 5	BW	ISO 105-B02

